

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 :

H02G 15/113, G02B 6/44, F16B 5/06,  
2/18

A1

(11) International Publication Number:

WO 00/65703

(43) International Publication Date: 2 November 2000 (02.11.00)

(21) International Application Number: PCT/GB00/01504

(22) International Filing Date: 18 April 2000 (18.04.00)

(30) Priority Data:

9909618.2

26 April 1999 (26.04.99)

GB

9914752.2

24 June 1999 (24.06.99)

GB

(71) Applicant (for AT AU BE BR CA CH CN CY CZ DE DK ES FI  
FR GB GR HU ID IE IL IN IT JP KR LU MC MX NL NO  
PL PT RO RU SE TR UA ZA only): N.V. RAYCHEM S.A.  
[BE/BE]; Diestsesteenweg 692, B-3010 Kessel-Lo (BE).(71) Applicant (for MG only): TYCO ELECTRONICS UK LTD.  
[GB/GB]; Faraday Road, Dorcan, Swindon, Wiltshire SN3  
5HH (GB).


(72) Inventor; and

(75) Inventor/Applicant (for US only): RADELET, Christiaan  
[BE/BE]; Koeistraat 41, B-3270 Scherpenheuvel (BE).(74) Agents: BEITSMA, Gerhard, Romano et al.; Tyco Electronics  
UK Ltd., European Patent Dept., Faraday Road, Dorcan,  
Swindon, Wiltshire SN3 5HH (GB).(81) Designated States: AU, BR, CA, CN, CZ, HU, ID, IL, IN,  
JP, KR, MG, MX, NO, PL, RO, RU, TR, UA, US, ZA,  
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

With international search report.

(54) Title: A CLOSURE CASING

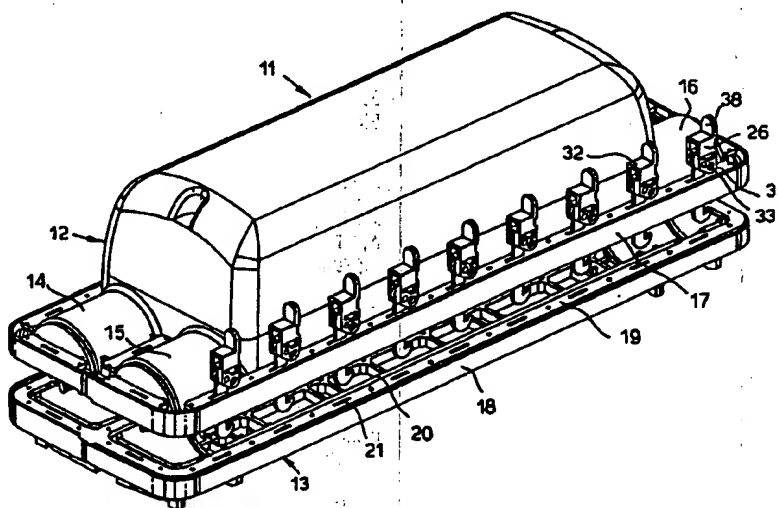

(57) Abstract

A closure casing (11) has two co-operating closure members (12, 13, 17, 18) defining an enclosed space between them when in a juxtaposed closure position. Means are provided for holding the closure members (12, 13) together in the closure position, such means comprising at least one over-centre or toggle clamp mechanism (26) one part (28) of which passes through openings (21) in the closure members (17, 18) which are aligned when the closure members (17, 18) are in the said closure position, to engage a face of the closure member (18) remote from the other part (27) of the toggle clamp mechanism (26). The other part (27) is turnable between a clamped position and a release position. us0010382zone (18) of the closure members (17, 18) has a resilient element (24) engageable by a part (28) of the toggle clamp mechanism (26) and operable to apply a resilient resistance to the clamping movement to hold the clamp mechanism (26) in its locking position.

Inc  
a7